



BendPak Boat Storage Lift Model(s) HD-7500BL / HD-7500BLX

Don't trust your precious boat to the unpredictability of the water, dry dock or yard storage. BendPak's HD-7500BL and HD-7500BLX boats lifts are a far better boat storage solution. Because they feature adjustable runways that accommodate cars and trucks as well, they also double as a DIY service lift or vehicle storage solution.

Our boat storage lifts are crafted to the same strict specifications as our high-quality automotive lifts, so you know that your boat is safer than ever. Top-of-the-line materials, industrial design, best-in-class engineering and convenient features that you won't find anywhere else are all hallmarks of our new BendPak boat storage systems

Using a premier BendPak boat storage lift is also a great way to shield you from monthly boat storage fees. The larger the boat, the bigger the bill—but there's no more cost-effective way to keep your boat safe than storing it in your own garage. Boat storage business owners can also benefit from BendPak boat lifts. You understand better than anyone what a difference increased storage capacity can mean for your bottom line. Offering your customers the safest, tailor-made boat storage lifting solution available today is one of the best investments you'll ever make.

Don't take chances—make sure your boat is high and dry on a BendPak boat storage lift.

















Features:

- 7,500 pound lifting capacity
- Two different lifting heights to choose
- Electric/hydraulic power system
- Internal "Anti-Sway' slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Multi-position safety locks in each column
- Ramps feature non-skid surface
- Optional 4500-lb. capacity jack available (Model RJ-45)

- Two different ramp lengths to choose
- Runways include rail-kit for optional accessories
- Single hydraulic cylinder underneath runway
- Oversized self-lubricating cable rollers
- Rugged 1-1/4" roller axles
- Adjustable lock ladders
- Push-button pneumatic safety release
- Durable powder coat finish

1645 Lemonwood Dr., Santa Paula, CA USA 93060 Tel: 1-805-933-9970 Fax: 1-805-933-9160

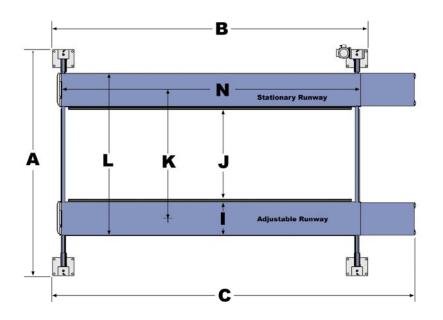



FOUR-POST BOAT LIFTS

Lifting Capacity* 7,500 lbs. / 3402 kg. 7,500 lbs. / 3402 kg. *Max Capacity / Front Half of Lift 3,750 lbs. / 1701 kg. 3,750 lbs. / 1701 kg. *Max Capacity / Rear Half of Lift 3,750 lbs. / 1701 kg. 3,750 lbs. / 1701 kg. 3,750 lbs. / 1701 kg. *Max Capacity / Rear Half of Lift 3,750 lbs. / 1701 kg. 3,750 lbs. / 1701 kg. A - Overall Width 132" / 3353 mm. 122" / 5028 mm. 200" / 5087 mm. 224" / 5704 mm. D - Height of Columns 88" / 2232 mm. 100" / 2537 mm. 5" / 125 mm. F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. 87" / 2208 mm. 1 - Rumway Height 75" / 1905 mm. 87" / 2208 mm. 1 - Rumway Width 19" / 482 mm. 19" / 482 mm. 19" / 482 mm. 1 - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. 1 - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 17	MODEL	HD-7500BL	HD-7500BLX
*Max Capacity / Front Half of Lift 3,750 lbs. / 1701 kg. 3,750 lbs. / 132" / 3353 mm. 3,750 lbs. / 132" / 3353 mm. 3,750 lbs. / 132" / 3353 mm. 3,750 lbs. / 1801 ms. 3,750 lbs. / 1801 ms. 3,750 lbs. / 1802 mm. 3,220 mm. 3			
*Max Capacity / Rear Half of Lift A - Overall Width B - Outside Length C - Overall Length C - Overal Length C - Overall Length C - Overall Length C - Overall Length			
A - Overall Width B - Outside Length C - Overall Length D - Height of Columns E - Min. Runway Height F - Max. Rise C - Min. Runway Height F - Max. Lifting Height F - Width Between Columns D - Height of Exempting F - Max. Lifting Height F - Width Between Columns F - Max. Lifting Height F - Width Between Runways (*) NARROW SETTING F - Width Between Runways (*) NARROW SETTING F - Width Between Runways (*) WIDE SETTING F - Runway Centerline (*) NARROW SETTING F - Runway Centerline (*) NARROW SETTING F - Runway Centerline (*) WIDE SETTING F - Width Between Runways (*) NARROW SETTING F - Width Between Runways (*) NARROW SETTING F - Width Between Runways (*) NARROW SETTING F - Width Between Runways (*) WIDE SETTING F - Width Between Runways (*) NARROW SETTING			
B - Outside Length 174" / 4418 mm. 198" / 5028 mm. C - Overall Length 200" / 5087 mm. 224" / 5704 mm. D - Height of Columns 88" / 2232 mm. 100" / 2537 mm. E - Min. Runway Height 5" / 125 mm. 5" / 125 mm. F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2222 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. <td>*Max Capacity / Rear Half of Lift</td> <td>3,750 lbs. / 1701 kg.</td> <td>3,750 lbs. / 1701 kg.</td>	*Max Capacity / Rear Half of Lift	3,750 lbs. / 1701 kg.	3,750 lbs. / 1701 kg.
C - Overall Length 200" / 5087 mm. 224" / 5704 mm. D - Height of Columns 88" / 2232 mm. 100" / 2537 mm. E - Min. Runway Height 5" / 125 mm. 5" / 125 mm. F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2224 mm. 88-1/2" / 2224 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm.<	A - Overall Width	132" / 3353 mm.	132" / 3353 mm.
D - Height of Columns 88" / 2232 mm. 100" / 2537 mm. E - Min. Runway Height 5" / 125 mm. 5" / 125 mm. F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. M - Length of Runways 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 85"	B - Outside Length	174" / 4418 mm.	198" / 5028 mm.
E - Min. Runway Height 5" / 125 mm. 5" / 125 mm. F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 88-1/2" / 1740 mm. 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. 68-1/2" / 2248 mm. 88-1/2" / 2224 mm. 88-1/2" / 2222 mm. 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - 21/2" / 2756 mm. 108-1/2" / 2756 mm. </td <td>C - Overall Length</td> <td>200" / 5087 mm.</td> <td>224" / 5704 mm.</td>	C - Overall Length	200" / 5087 mm.	224" / 5704 mm.
F - Max. Rise 70" / 1778 mm. 82" / 2083 mm. G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions <t< td=""><td>D - Height of Columns</td><td>88" / 2232 mm.</td><td>100" / 2537 mm.</td></t<>	D - Height of Columns	88" / 2232 mm.	100" / 2537 mm.
G - Max. Lifting Height 75" / 1905 mm. 87" / 2208 mm. H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1765 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 22248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2730 mm. 107-1/2" / 2730 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm.	E – Min. Runway Height	5" / 125 mm.	5" / 125 mm.
H - Width Between Columns 122" / 3099 mm. 122" / 3099 mm. I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 25% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 1	F – Max. Rise	70" / 1778 mm.	82" / 2083 mm.
I - Runway Width 19" / 482 mm. 19" / 482 mm. J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 25% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	G - Max. Lifting Height	75" / 1905 mm.	87" / 2208 mm.
J - Width Between Runways (*) NARROW SETTING 49-1/2" / 1257 mm. 49-1/2" / 1257 mm. J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	H - Width Between Columns	122" / 3099 mm.	122" / 3099 mm.
J - Width Between Runways (*) WIDE SETTING 69-1/2" / 1765 mm. 69-1/2" / 1765 mm. K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	I - Runway Width	19" / 482 mm.	19" / 482 mm.
K - Runway Centerline (*) NARROW SETTING 68-1/2" / 1740 mm. 68-1/2" / 1740 mm. K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 25% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	J - Width Between Runways (*) NARROW SETTING	49-1/2" / 1257 mm.	49-1/2" / 1257 mm.
K - Runway Centerline (*) WIDE SETTING 88-1/2" / 2248 mm. 88-1/2" / 2248 mm. L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	J - Width Between Runways (*) WIDE SETTING	69-1/2" / 1765 mm.	69-1/2" / 1765 mm.
L - Outside Edge of Runways (*) NARROW SETTING 87-1/2" / 2222 mm. 87-1/2" / 2222 mm. L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	K - Runway Centerline (*) NARROW SETTING	68-1/2" / 1740 mm.	68-1/2" / 1740 mm.
L - Outside Edge of Runways (*) WIDE SETTING 107-1/2" / 2730 mm. 107-1/2" / 2730 mm. M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	K - Runway Centerline (*) WIDE SETTING	88-1/2" / 2248 mm.	88-1/2" / 2248 mm.
M - Drive-Thru-Clearance 108-1/2" / 2756 mm. 108-1/2" / 2756 mm. N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	L - Outside Edge of Runways (*) NARROW SETTING	87-1/2" / 2222 mm.	87-1/2" / 2222 mm.
N - Length of Runways 164" / 4166 mm. 188" / 4775 mm. Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	L - Outside Edge of Runways (*) WIDE SETTING	107-1/2" / 2730 mm.	107-1/2" / 2730 mm.
Min. Wheelbase @ Rated Capacity 115" / 2921 mm. 135" / 3429 mm. Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	M - Drive-Thru-Clearance	108-1/2" / 2756 mm.	108-1/2" / 2756 mm.
Min. Wheelbase @ 75% Capacity 100" / 2540 mm. 115" / 2921 mm. Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	N - Length of Runways	164" / 4166 mm.	188" / 4775 mm.
Min. Wheelbase @ 50% Capacity 85" / 2159 m. 95" / 2413 mm. Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	Min. Wheelbase @ Rated Capacity	115" / 2921 mm.	135" / 3429 mm.
Min. Wheelbase @ 25% Capacity 70" / 1778 mm. 80" / 2032 mm. Locking Positions 12 15 Lock Spacing Every 4" / 102 mm. Every 4" / 102 mm. Lifting Time 45 Seconds 50 Seconds	Min. Wheelbase @ 75% Capacity	100" / 2540 mm.	115" / 2921 mm.
Locking Positions1215Lock SpacingEvery 4" / 102 mm.Every 4" / 102 mm.Lifting Time45 Seconds50 Seconds	Min. Wheelbase @ 50% Capacity	85" / 2159 m.	95" / 2413 mm.
Lock SpacingEvery 4" / 102 mm.Every 4" / 102 mm.Lifting Time45 Seconds50 Seconds	Min. Wheelbase @ 25% Capacity	70" / 1778 mm.	80" / 2032 mm.
Lifting Time 45 Seconds 50 Seconds	Locking Positions	12	15
	Lock Spacing	Every 4" / 102 mm.	Every 4" / 102 mm.
Standard Motor (**) 220 VAC / 60 Hz. 1Ph. 220 VAC / 60 Hz. 1Ph.	Lifting Time	45 Seconds	50 Seconds
	Standard Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.

^{*} This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.

The design, material and specifications are subject to change without notice.

^{**} Special Voltages Available Upon Request

